

ELECTROCHLOR

Salt water pool chlorinator

ElectroChlor automatically generates chlorine to keep your swimming pool clean and healthy.

- Easy to set & operate.
- Precision chlorine production controls
- High performance titanium electrolytic cell
- Self cleaning electrolytic cell (optional)
- 4 bar pressure rated salt cell housing



Pool Sanitisation

Indoor and outdoor pools are contaminated by a number of human-borne and airborne contaminants, which can come from a variety of sources. These include: sweat, bathing oils/cosmetics, bacteria and other atmospheric pollutants. For this reason, any treatment process must deal with a diverse numbers and kinds of elements which vary over time based on the time of day and in the case of outdoor pools, the local atmospheric conditions.

Chlorine is one of the most effective treatment of water to make it potable or safe to drink. Chlorine's powerful disinfectant qualities come from its ability to bond with and destroy the outer surfaces of bacteria and viruses. Chlorination is one of the most widely used methods to safeguard drinking water supplies.

"Chlorine occurs in nature, mainly as a common salt"

Chlorine Production by Electrolysis

Through the process of electrolysis, a saline solution pass over an electrolytic cell, then the saline solution is separated into its basic components: chlorine and sodium. The chlorine is instantaneously transformed into Hypochlorous acid; this is the chlorine form that kills algae and other harmful organism in the water.

A chlorine generator's main function is to produce chlorine for the pool. This keeps a residual of chlorine in the pool that prevents algae from growing. The chlorine then turns back into salt and the system continues as long as the generator is functioning properly.



"The concentration of salt in a human tear is about 5000 ppm"

Why Salt-Water?


Ocean water has a salt content of around 35,000 parts per million ("ppm"). Humans have a salt taste threshold of around 3,500 ppm. The Electrochlor Chlorinator requires a salt content of 4000 - 6500 ppm in the pool.

Swimming in a mild saline solution is much like taking a shower in soft water. In a salt-water pool (one with an Electrochlor) the water feels silky, your skin feels smooth and many people feel more refreshed.

Electrochlor Salt Water Chlorinator

The Electrochlor will automatically maintain the chlorine level of your pool and eliminate problems associated with periods of very high or low chlorine levels. Fewer fluctuations in chlorine levels mean fewer fluctuations in pH levels. This adds up to more stable, balanced water.

Consistently maintained sanitizer levels in the pool water will prevent the growth of all common algae. A salt-water chlorinated pool requires much less attention than a chlorine pool. A salt water pool provides a more comfortable swimming environment. Salt water feels better and is less irritating to the body than standard chlorinated water.

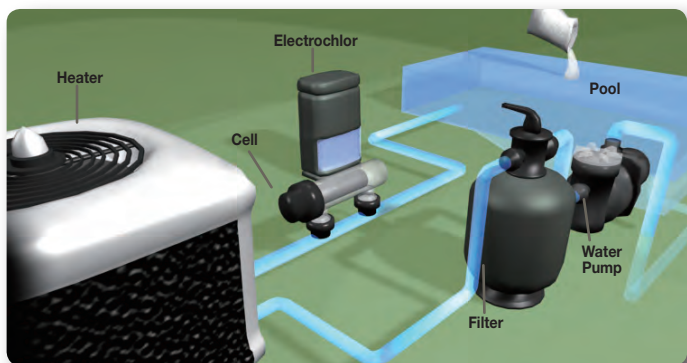

The Electrochlor is plumbed directly in-line with the pool equipment, typically after the heater

Electrochlor consists of a power pack (to supply power to the cell) and a Salt Cell (where chlorine is produced)

Automated Power Pack:


The Power Pack monitors and controls chlorine production by regulating the amount of electrical energy supplied to the salt cell.



Long Life Salt Cell:

The Electrochlor's salt cell consists of a series of titanium electrodes with opposite charges. Electrochlor's clear salt cell housing allows visual inspection of the salt cell plates and enables monitoring of chlorine production.

The cell housing is constructed using clear U.V. stabilized acrylic. Both anode and cathode of the self-clean chlorinator are made from uniquely coated titanium mesh to add extra durability and life.

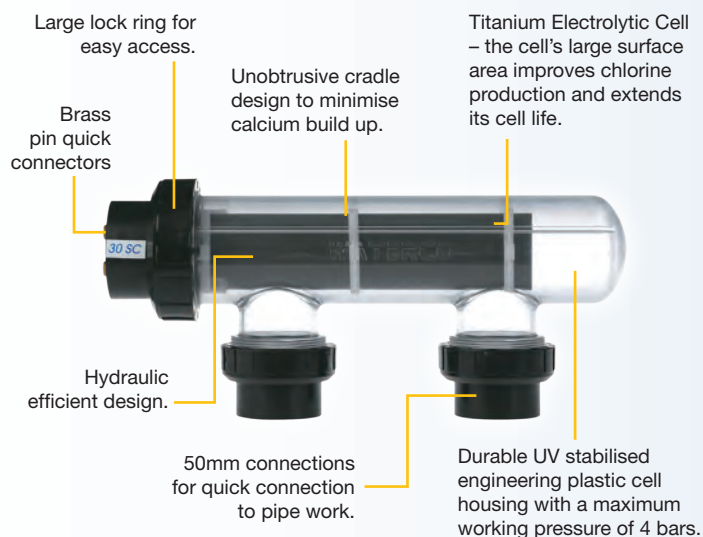

Low Maintenance:

Electrochlor Self Clean Salt Cell has the added ability to reverse the polarity of the voltage to clean calcium build-up off its electrodes.



Brass pin connections – utilising quick connectors for quick simple removal of the cell

Salts Level – Operation:

Once an Electrochlor is installed and the desirable salt level is achieved (see table), salt needs only to be added occasionally to replace any water loss e.g. splash out, evaporation, backwashing.

| Salt Levels (ppm) | | |
|-------------------|----------------|----------------|
| Minimum = 4000 | Optimum = 5500 | Maximum = 6000 |

Note: Low salt level will reduce the life of the salt cell and lead to low chlorine production

Five Years Warranty:

| Electrochlor Chlorinator | 2 years + 3 years pro rata* |
|--------------------------|-----------------------------|
| Titanium cell | 2 years + 3 years pro rata |
| Power pack | 2 years |
| Commercial Installations | 1 year |

*Please refer to Waterco's Warranty terms and conditions.

FREQUENTLY ASKED QUESTIONS

Is there a difference between 'salt chlorinator' chlorine and 'normal' chlorine?

A salt chlorinator makes chlorine the same way a chlorine factory does. The difference is that it is manufactured in your pool. Liquid chlorine is approximately 12.5% pure, whereas Electrochlor's chlorine is 100% pure.

Will I ever need to add standard pool chlorine again?

From time to time it may become necessary to add some chlorine to the pool. This may be due to heavy rain or if the chlorine level needs to be shocked back up.

Does the salt damage pool equipment?

No. Low levels of salt have relatively insignificant corrosive effects on pool fittings and equipment.

How do I get started?

It's easy! After installing your salt chlorinator, you simply add the recommended amount of salt to your pool and choose your desired chlorine level.

How much salt will I need?

1 kg of salt in 1,000 litres of water raises the salt level by 1,000ppm. Therefore, 420 kg of salt will raise a 70,000 litres pool from 0 ppm to 6,000 ppm.

What type of salt should I use?

High purity salt, it is important that the salt does not contain additives. Any common salt (like table salt) usually has an additive that may have staining properties.




ElectroChlor Technical Specifications

| Model | Input Watt kW (max) | Output current DC amp (max) | Chlorine production gram/hour | Max Pool Capacity Climate | |
|--------------|---------------------|-----------------------------|-------------------------------|---------------------------|---------------|
| | | | | Temperate | Tropical |
| 25A / 25A SC | 0.3125 | 25 | 25 | 100,000 litres | 60,000 litres |
| 30A / 30A SC | 0.3750 | 30 | 30 | 120,000 litres | 72,000 litres |


| | 25A / 25A SC | 30A / 30A SC |
|-------------------------------|----------------------|----------------------|
| Primary input volts | 220-240 VAC 50/60 Hz | 220-240 VAC 50/60 Hz |
| Input power | 330W | 380W |
| Max. total current | 10A | 10A |
| Pump outlet max. | 8A | 8A |
| Cell volts | 6-8V | 6-8V |
| Degr. of protection to AS1939 | IP23 | IP23 |

- All units are equipped with a 3 amp self-resetting fuse.
- Pool capacity is based on a stabilised swimming pool with a minimum salt level of 5,000 ppm.

ElectroChlor Power Pack Dimensions

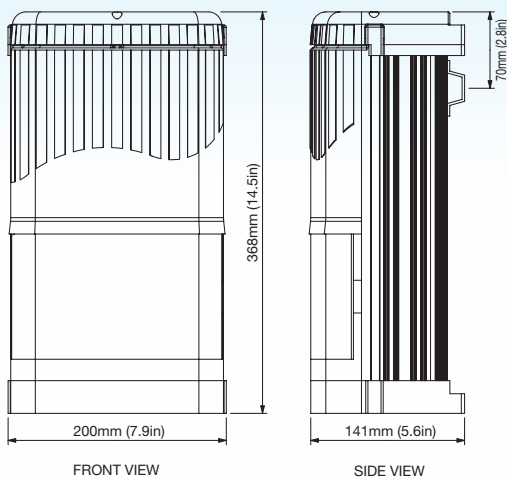


ElectroChlor Self Clean Cell Dimensions

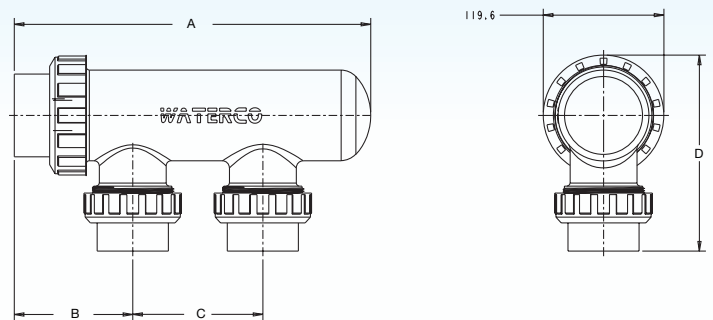

| Model | A | B | C | D |
|-------|---------|---------|-------|---------|
| 30 SC | 423.5mm | 136.5mm | 280mm | 188.8mm |
| 25 SC | 353.5mm | 117.5mm | 129mm | 194.3mm |

ElectroChlor Standard Cell Dimensions

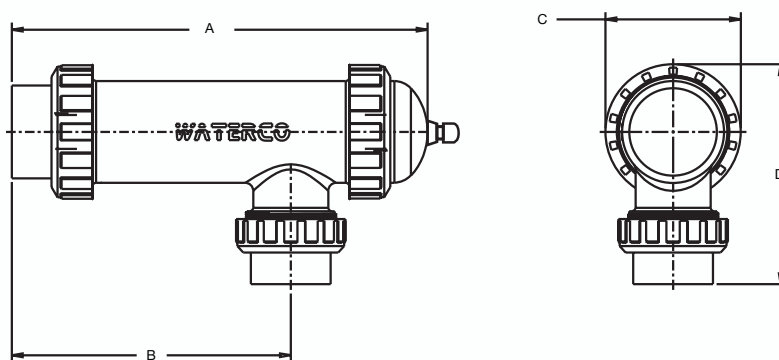

| Model | A | B | C | D |
|-----------|-------|-------|------|-------|
| 25A / 30A | 385mm | 275mm | 96mm | 163mm |

These chlorinators are approved and conformed to AS3136 Swimming Pool Equipment, as a prescribed article under Australian Registration.
These chlorinators conform to the Australian Electromagnetic Compatibility Standard marked by the C-tick.



Established since 1981, Waterco is an Australian public listed company involved in the manufacture and distribution of:

Swimming pool/spa equipment and chemicals
Domestic water filters, softeners and purifiers
Commercial and Industrial water treatment equipment.

Waterco's research & development team has created an innovative range of award winning products.

The company's advanced fibreglass winding and pioneering plastic moulding techniques have delivered premium quality products to over 40 countries via its branches operating in Australia, New Zealand, Malaysia, China, the United Kingdom, United States of America, Canada, Indonesia and Singapore.

30
years
Since 1981

OFFICES - AUSTRALIA

NSW - Sydney (Head Office)
Tel: +61 2 9898 8600
QLD - Brisbane
Tel: +61 7 3299 9900
VIC/TAS - Melbourne
Tel: +61 3 9764 1211
WA - Perth
Tel: +61 8 9273 1900
SA/NT - Adelaide
Tel: +61 8 8244 6000
ACT Distribution
Tel: +61 2 6280 6476

OFFICES - OVERSEAS

Waterco (Europe) Limited
Sittingbourne, Kent. UK
Tel: +44 (0) 1795 521 733
Waterco (USA) Inc
Augusta, Georgia, USA
Tel: +1 706 793 7291
Waterco Canada
St Hyacinthe, Quebec, Canada
Tel: +1 450 796 1421
Waterco (NZ) Limited
Auckland, New Zealand
Tel: +64 9 525 7570

Waterco (C) Limited
Guangzhou, China
Tel: +86 20 3222 2180

Waterco (Far East) Sdn Bhd
Selangor, Malaysia
Tel: +60 3 6145 6000

PT Waterco Indonesia
Jakarta, Indonesia
Tel: +62 21 4585 1481

Waterco Singapore Intl Pte Ltd
Nehsons Building, Singapore
Tel: +65 6344 2378

DISTRIBUTED BY:

WATERCO
water, the liquid of life

